

LVP909 LED HD Video Processor

Version	Time	Description	Draft
V1.0	2017.6.5		ZZH
V1.0	2017.6.5	Translate	DYJ




I Features

- ◆ Advanced interlaced motion image adaptive processing technology to eliminate video image movement tail and saw-tooth phenomenon
- ◆ Multiple analog and digital mixed signals input including 2*Video、1*VGA、1*HDMI、1*DVI、1*SDI / HD-SDI / 3G-SDI;
- ◆ Outputs: 1*VGA、 4*DVI. Each port max output resolution 1920*1200/60Hz or 1440*1440 @60Hz.
- ◆ Zoom in sync , stand-alone unit supports maximum horizontal 7680 pixels or vertical 4800 pixels;
- ◆ Seamless switching,fade in fade out switching wipe switching between any inputs.
- ◆ Support one key switching and Preselect + Take switching.
- ◆ Preview monitor supports monitor current signals and preselect signals.
- ◆ Support 2 channels, 3 channels, 4 channels splicing output.
- ◆ Support single, 2 or 3 or 4 images display.
- ◆ Support auto calculating the splicing parameters.
- ◆ Multiple pre-stored mode calls. Seamless switching or fade in fade out switching between modes.
- ◆ Variety of control methods: front panel button、RS232、USB and LAN.
Flexible operation.

II Specification

Inputs		
type/nums	2×Video 1×VGA（RGBHV） 1×HDMI（VESA/ CEA-861） 1×DVI（VESA/ CEA-861） 1×SDI（SDI/HD-SDI/3G-SDI）	
Video system	PAL/NTSC	
composite video scope/ Impedance	1V（p_p） / 75Ω	
VGA format	PC（VESA standard）	≤1920×1200_60Hz
VGA scope/ Impedance	R、G、B = 0.7 V（p_p） / 75Ω	
DVI/HDMI format	PC（VESA standard）	≤1920×1200_60Hz
	HDMI-1.3（CEA-861）	≤1920×1080p_60Hz
SDI format	SMPTE259M-C SMPTE 292M SMPTE 274M/296M SMPTE 424M/425M	480i_60Hz 576i_50Hz 720p、1080i、1080p
Input ports	Video: P4 of VGA port VGA: 15pin D_Sub(female) HDMI: A type of HDMI port DVI: 24+1 DVI_D SDI: BNC/ 75Ω	
outputs		
type/nums	1×VGA 4×DVI	
Preview output	1×VGA（DVI OUT4）	
DVI Format	1024×768_60Hz 1280×1024_60Hz 1920×1080p_60Hz 1440×1440_60Hz 1920×1200_60Hz	
Output port	DVI: 24+1 DVI_I	
others		
Control ports	Panel/RS232/USB/LAN/	
Input voltage	100-240VAC 50/60Hz	
power	≤45W	
temperature	0-45℃	
humidity	15-85%	
Product size	482.6(L) x274(W) x 66.6(H)mm	
Packing size	520(L) x350(W) x 130(H)mm	
N.W.	4.2Kg	
G.W.	5.5Kg	

III Connection Diagram

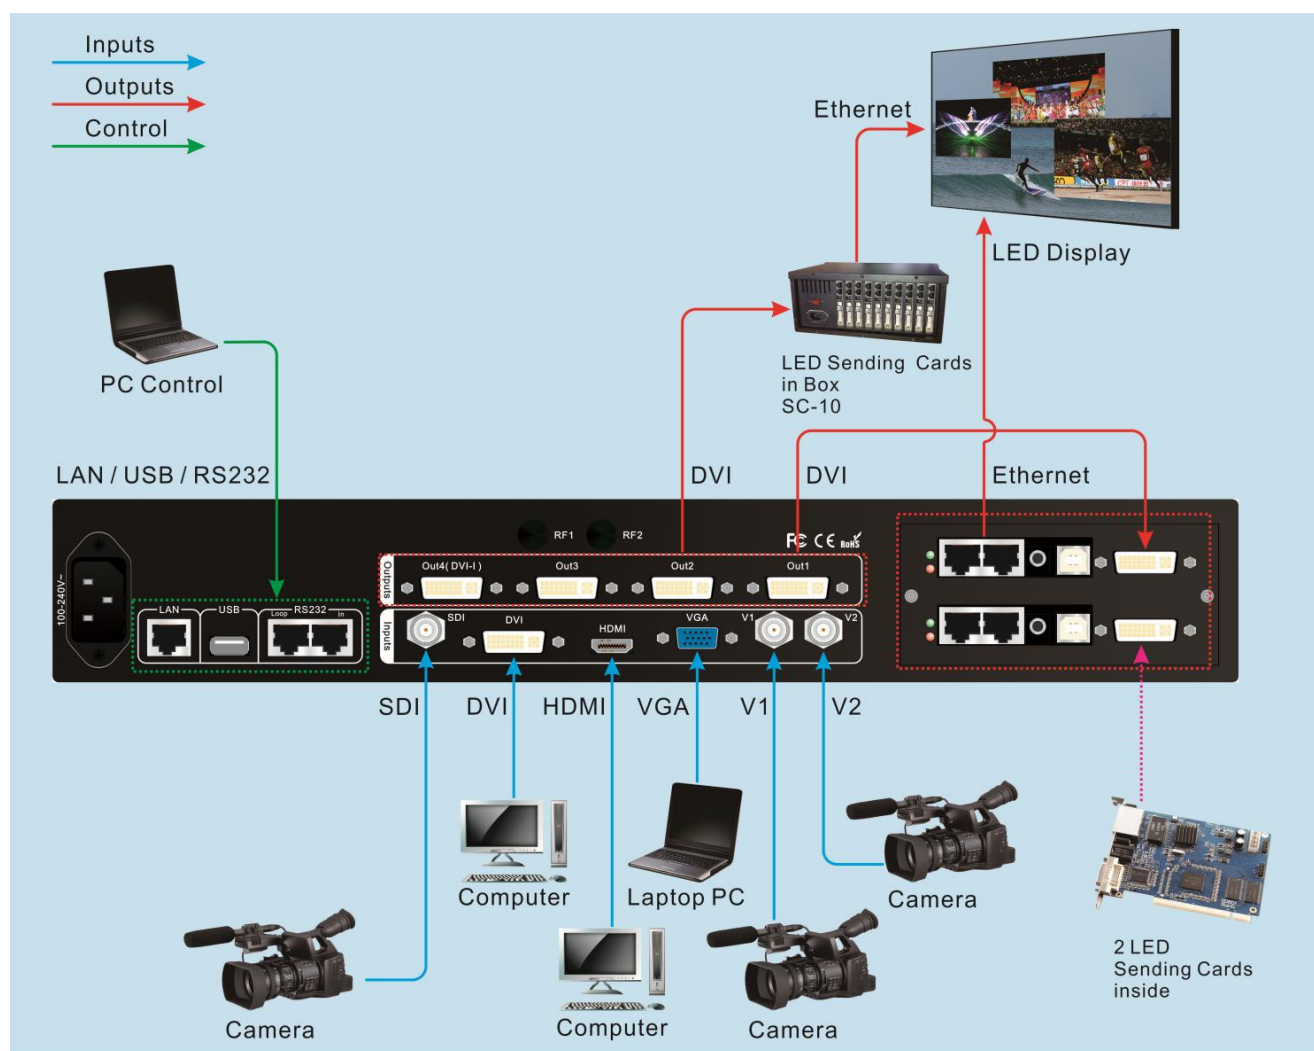

IV Product Dimension

